

Type: _____

Model: _____

Project: _____

MODEL: 490010 "Diplomat" LED MR16/Bi-Pin Wall Wash Fixture

SPECIFICATIONS

HOUSING:

Cast brass with weathered brass finish. Angled shroud with gasketed lens.

SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket accepts MR16 with GU5.3 base or bi-pin lamps with G4 and GY6.35 bases.

LENS:

Clear and frosted tempered glass lenses included.

LAMP TYPE:

12V SMD or encapsulated bi-pin or MR16. 35W maximum. See Dauer lamp ordering information on back page.

MOUNTING:

Stem threaded with 1/2" NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories shown on back page.

WIRING:

Prewired with 5' pigtail of 18/2 cable.



WARRANTY:

Lifetime.



The cast brass Diplomat large wall wash casts a very broad and even light on surfaces and scenery. Choose between the included clear and frosted lens options. Dozens of bi-pin lamp options maximize your creative expression for wall washing applications, or install an MR16 LED lamp if you desire a longer throw or narrower, more directional beam-spread options ranging from 15° to 100°. Heavy-duty stake included.

DIMENSIONS:

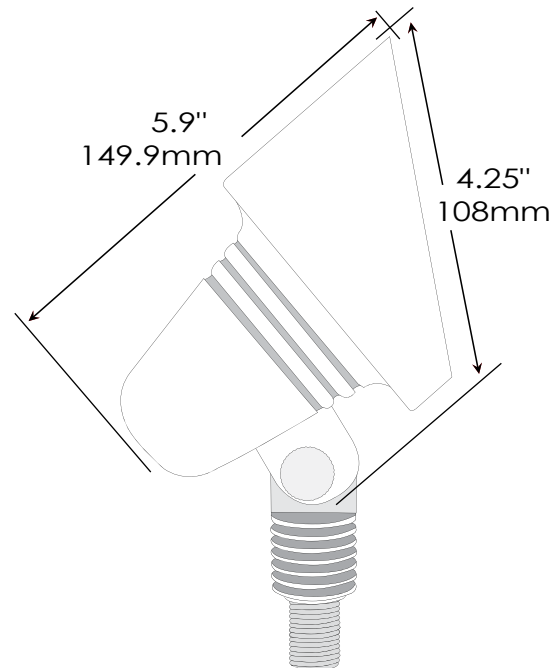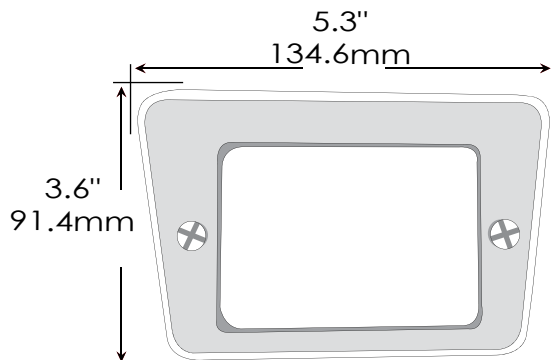

LED LAMP SPECIFICATIONS

LAMP TYPES:

Dauer MR16 UL-listed (E353116) 12V lamp suitable for enclosed luminaires, or Dauer IP65 outdoor-rated SMD or encapsulated bi-pin, all with 5-year warranty.

OPTICS:

MR16 integral optics providing available beam spreads from 15° to 100°. No optics for SMD or encapsulated bi-pin lamps.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2800K and 3000K=warm white; 4000K=neutral white; 5000K and 6000K=cool white. Decorative color light options include amber, blue, green, and red.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLES: 490010-5W-MR16-40-2700K-MS-R2
490010-2W-E-6000K-M3-R12



FIXTURE	LAMP			MOUNTING		RISER	
490010	TYPE	BEAM SPREAD	COLOR TEMP.	MS	Composite stake (incl.) 490029	R2	2" brass riser 490038
	2W-MR16	25° / 40° / 60° / 100°	2700K / 3000K	M3	3-prong tri-stake 490030	R3	3" brass riser 490039
	4W-MR16	25° / 40° / 60° / 100°	2700K / 3000K	MY	Y-bracket surface mount 490045	R6	6" brass riser 490031
	5W-MR16	15° / 25° / 40° / 60° / 100°	2700K / 3000K	MG	Brass gutter mount 490047	R12	12" brass riser 490032
		25°	Amber / Blue / Green / Red	MR	Round 3-hole surface mount 490048	R24	24" brass riser 490033
	6W-MR16	25° / 40° / 60°	2700K / 3000K	MP	PVC mounting stake 490037		
	7W-MR16	25° / 40°	2700K / 3000K / 4000K / 5000K				
		60°	2700K / 3000K				
	2W-E (encapsulated bi-pin)			2800K / 6000K			
	3W-E (encapsulated bi-pin)			2800K			
	3.3W-S (SMD bi-pin)			Amber / Blue / Green / Red			
	4W-S (SMD bi-pin)			2800K			
	5W-S (SMD bi-pin)			2800K			